


For Vent Wiring or controller/thermostat connections,
see literature packet or go to www.bardhvac.com

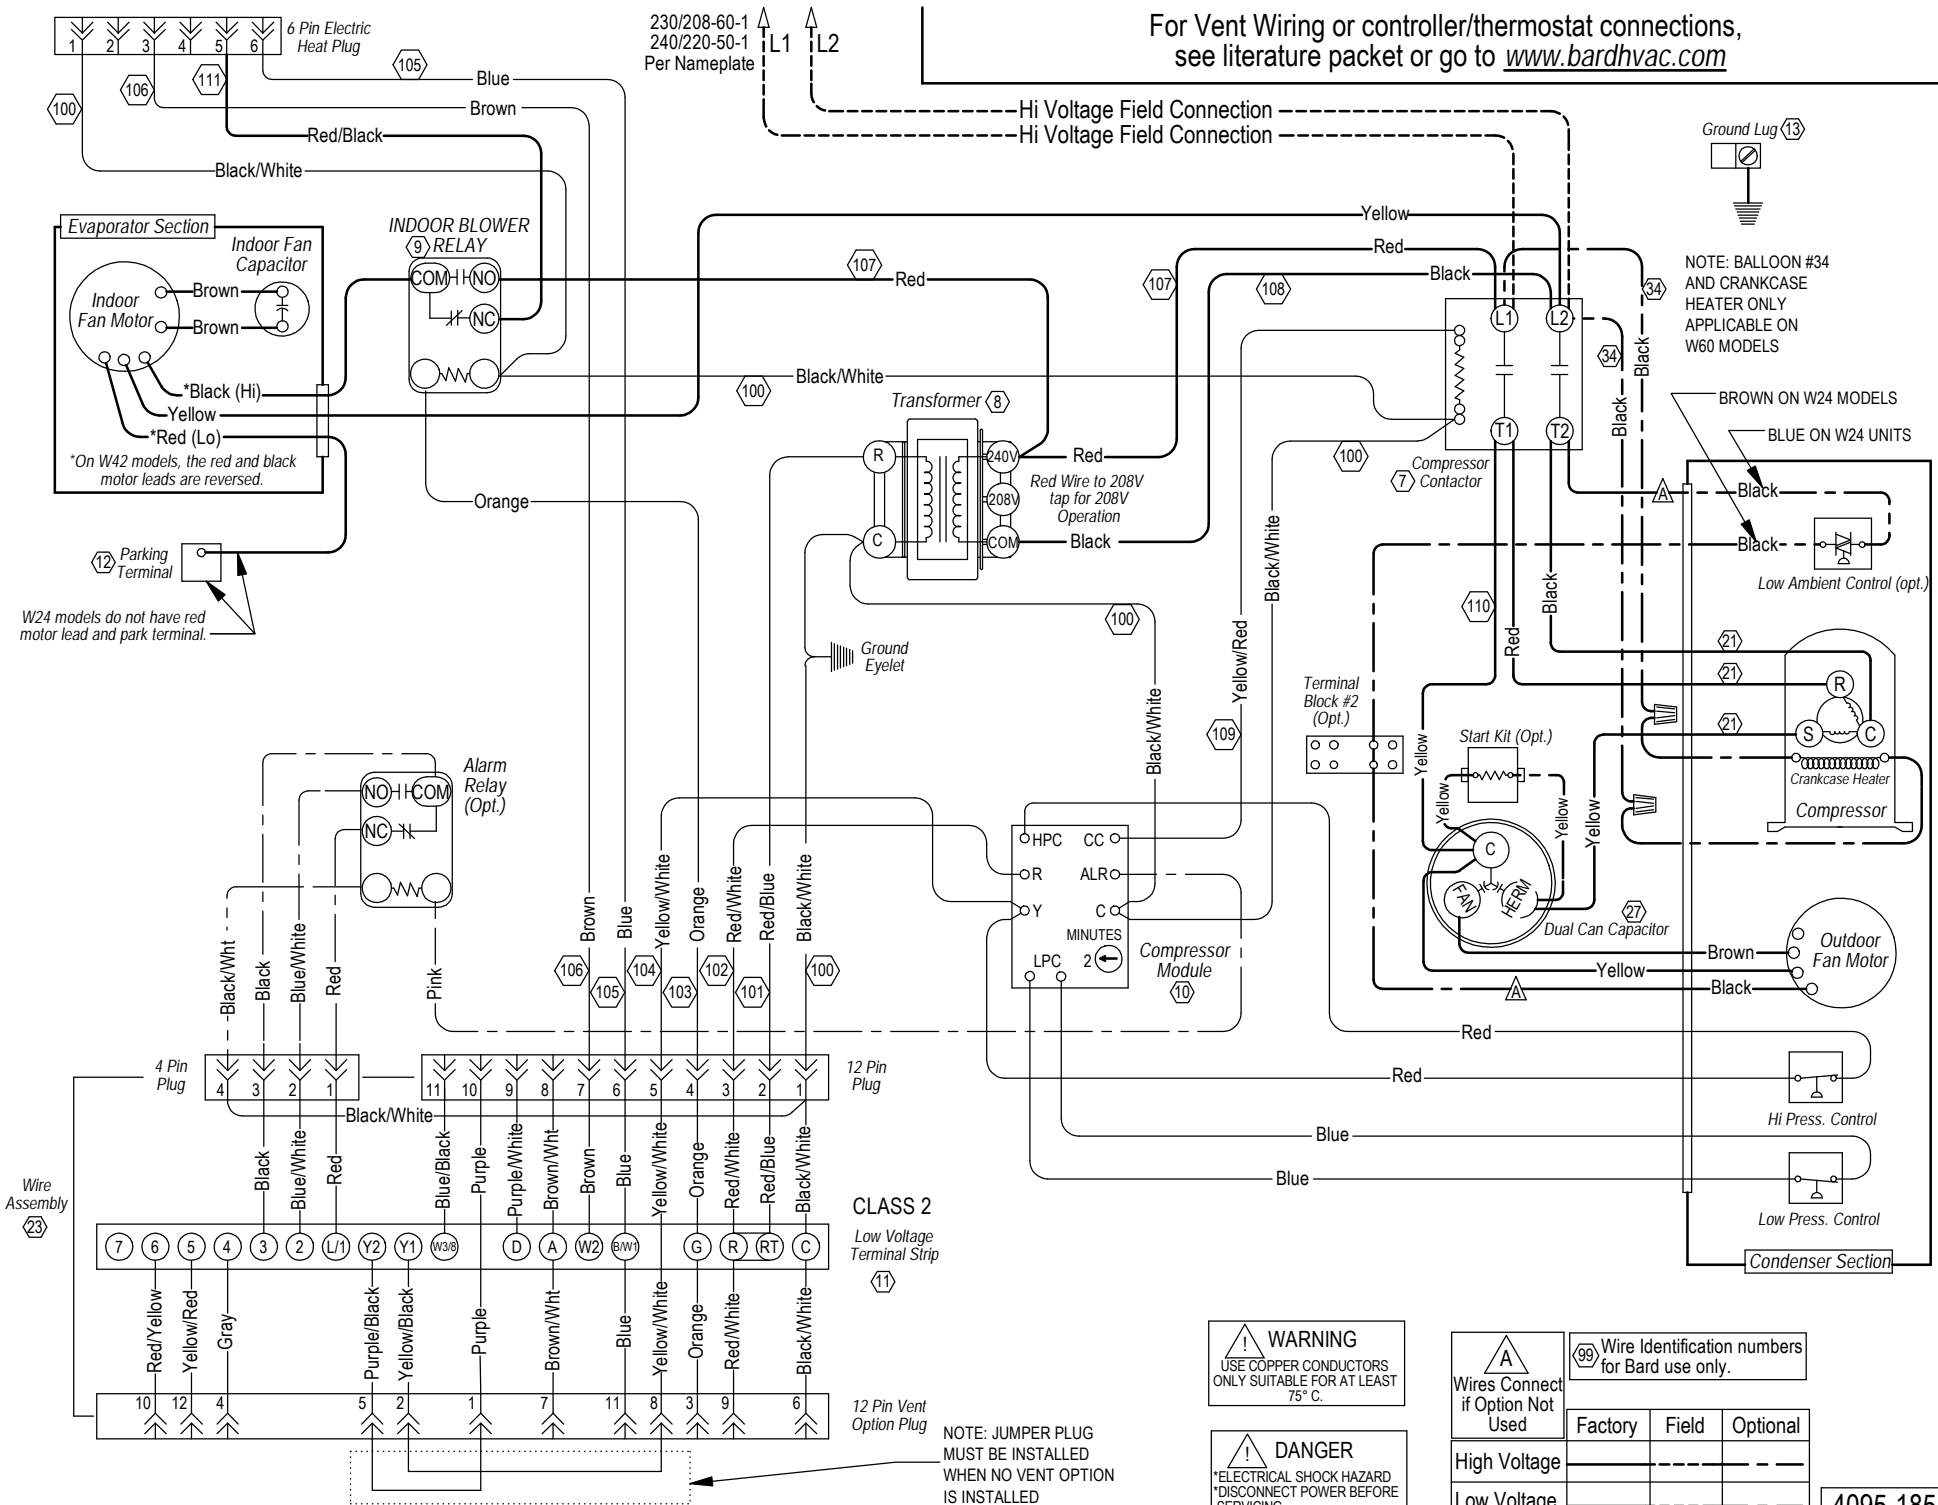

W24 models do not have red motor lead and park terminal.

NOTE: BALLOON #34 AND CRANKCASE HEATER ONLY APPLICABLE ON W60 MODELS

BROWN ON W24 MODELS
BLUE ON W24 UNITS

CLASS 2
Low Voltage Terminal Strip
11

WARNING
USE COPPER CONDUCTORS ONLY SUITABLE FOR AT LEAST 75° C.

DANGER
ELECTRICAL SHOCK HAZARD DISCONNECT POWER BEFORE SERVICING.

Wires Connect if Option Not Used	99 Wire Identification numbers for Bard use only.		
	Factory	Field	Optional
High Voltage			
Low Voltage			

4095-185 C

NOTE: JUMPER PLUG MUST BE INSTALLED WHEN NO VENT OPTION IS INSTALLED